


### ServerNet II protocol layers

End Node VLA NIC

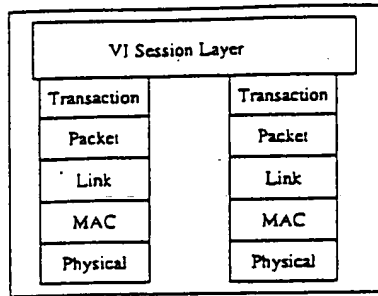

### Routing Node

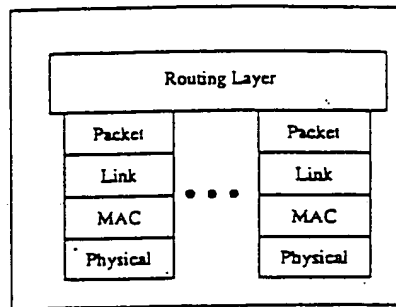


Fig-1

## ServerNet II System Area Network

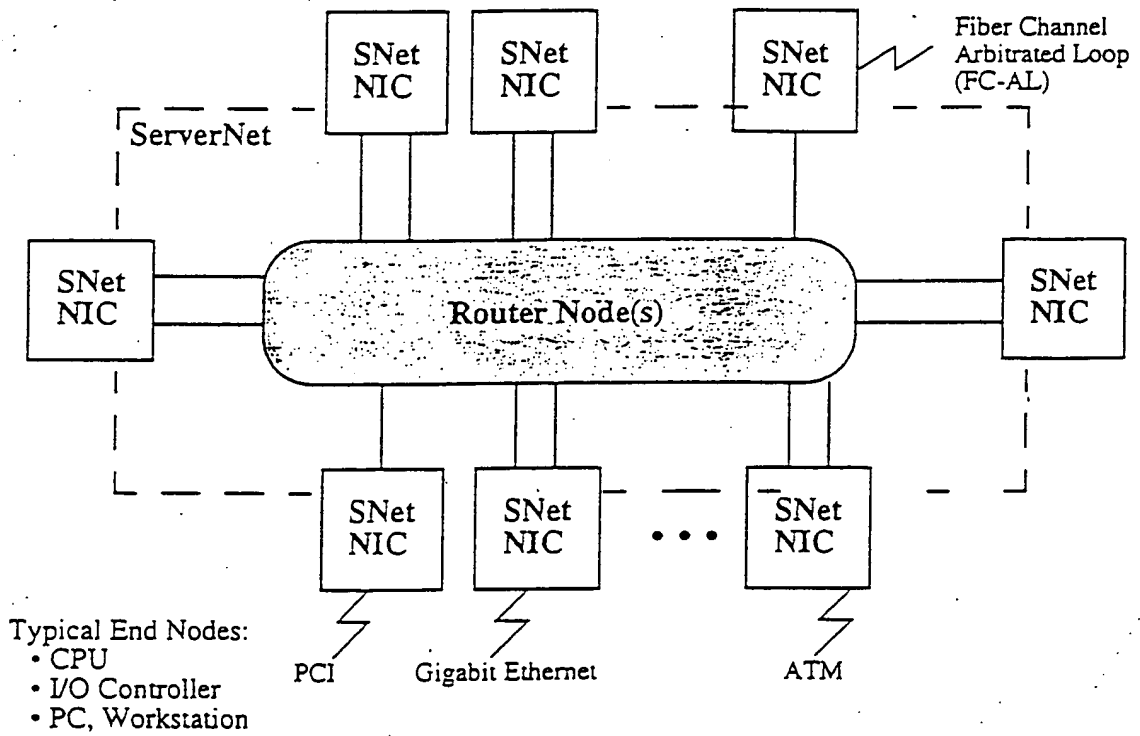


Fig. 2

22-141 50 SHEETS  
22-142 100 SHEETS  
22-144 200 SHEETS



# Fault Tolerant ServerNet II System Area Network

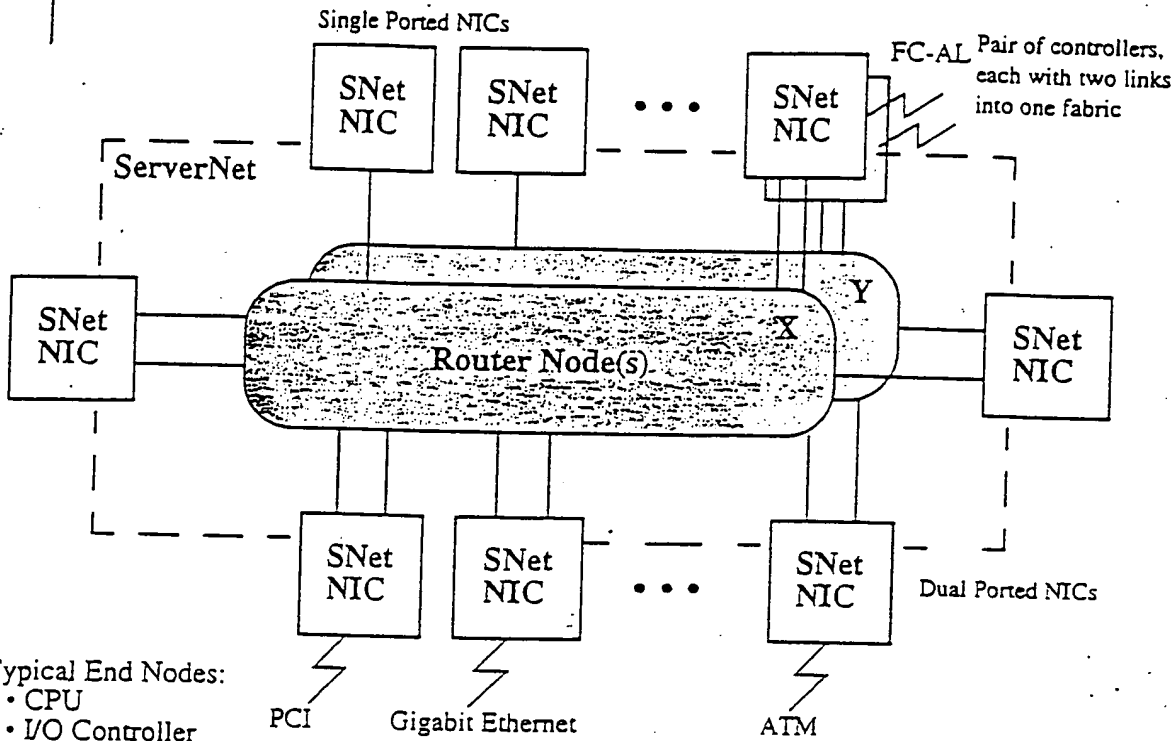


Fig. 3


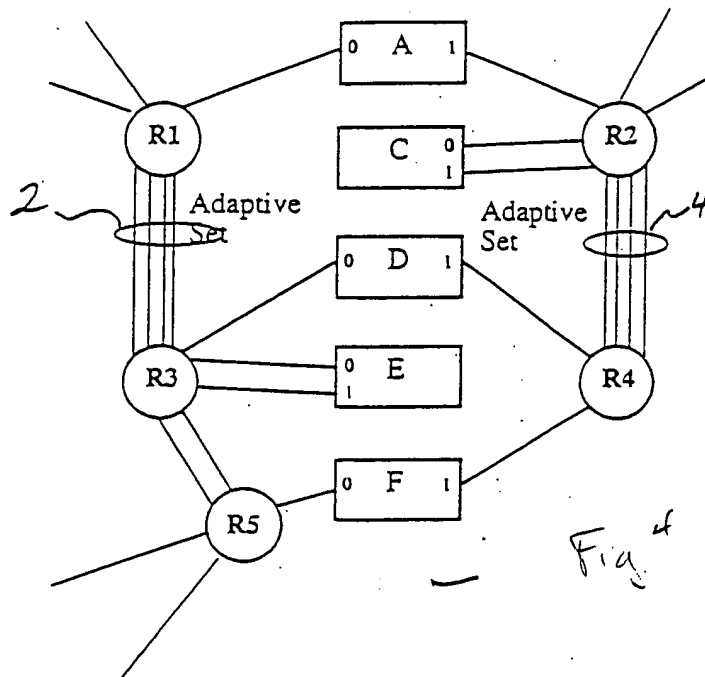


Fig. 4

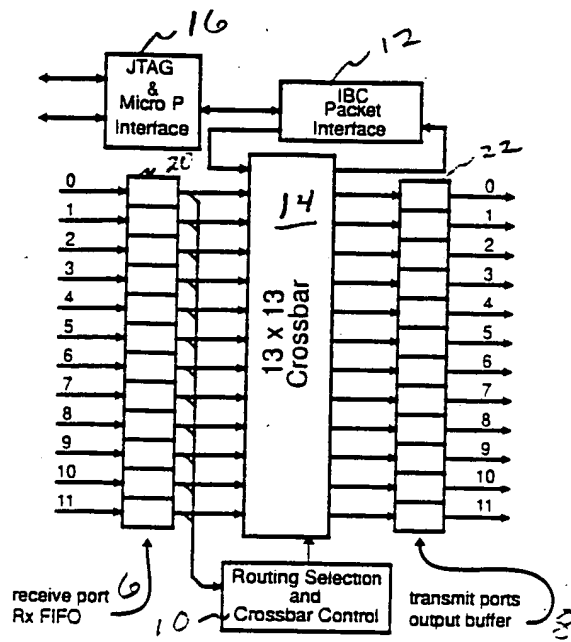

Router Block Diagram

Fig. 5

Table 2 Physical link translation into Physical lane


Fat pipe	Physical lane 0	Physical lane 1	Physical lane 2	Physical lane 3
0	1	6	9	
1	5	7	8	11

Fig 6

Destination ID (DID) 20b	ACB 3b	1b	Source ID (SID) 20b	Control 20b
-----------------------------	-----------	----	------------------------	----------------

**Figure 7 . Packet Header**

00500074T02900

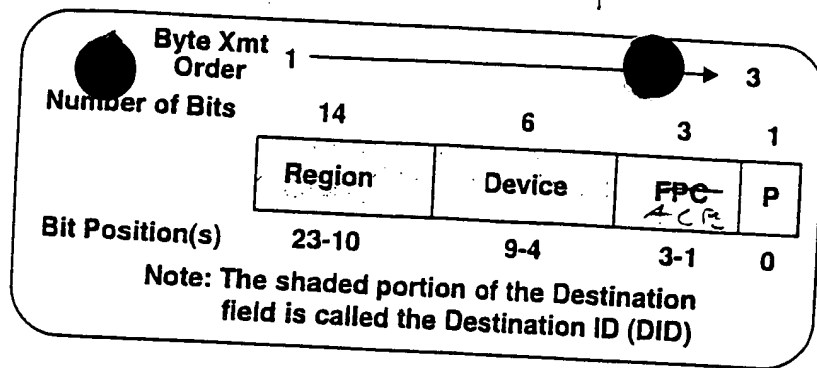


## Destination Field in Packet Header

Fig. 8

## Figure 9: Adaptive Control Bits (ACB) Encoding Definition

Encoding	Definition
000	Ordered packet delivery to lane 0 if routed to a port in an Adaptive Set
001	Ordered packet delivery to lane 1 if routed to a port in an Adaptive Set
010	Ordered packet delivery to lane 2 if routed to a port in an Adaptive Set
011	Ordered packet delivery to lane 3 if routed to a port in an Adaptive Set
100	Unordered packet delivery to lane determined by Adaptive Set logic
101 - 111	Reserved (logic in Router-II treats this the same as the 100 encoding)

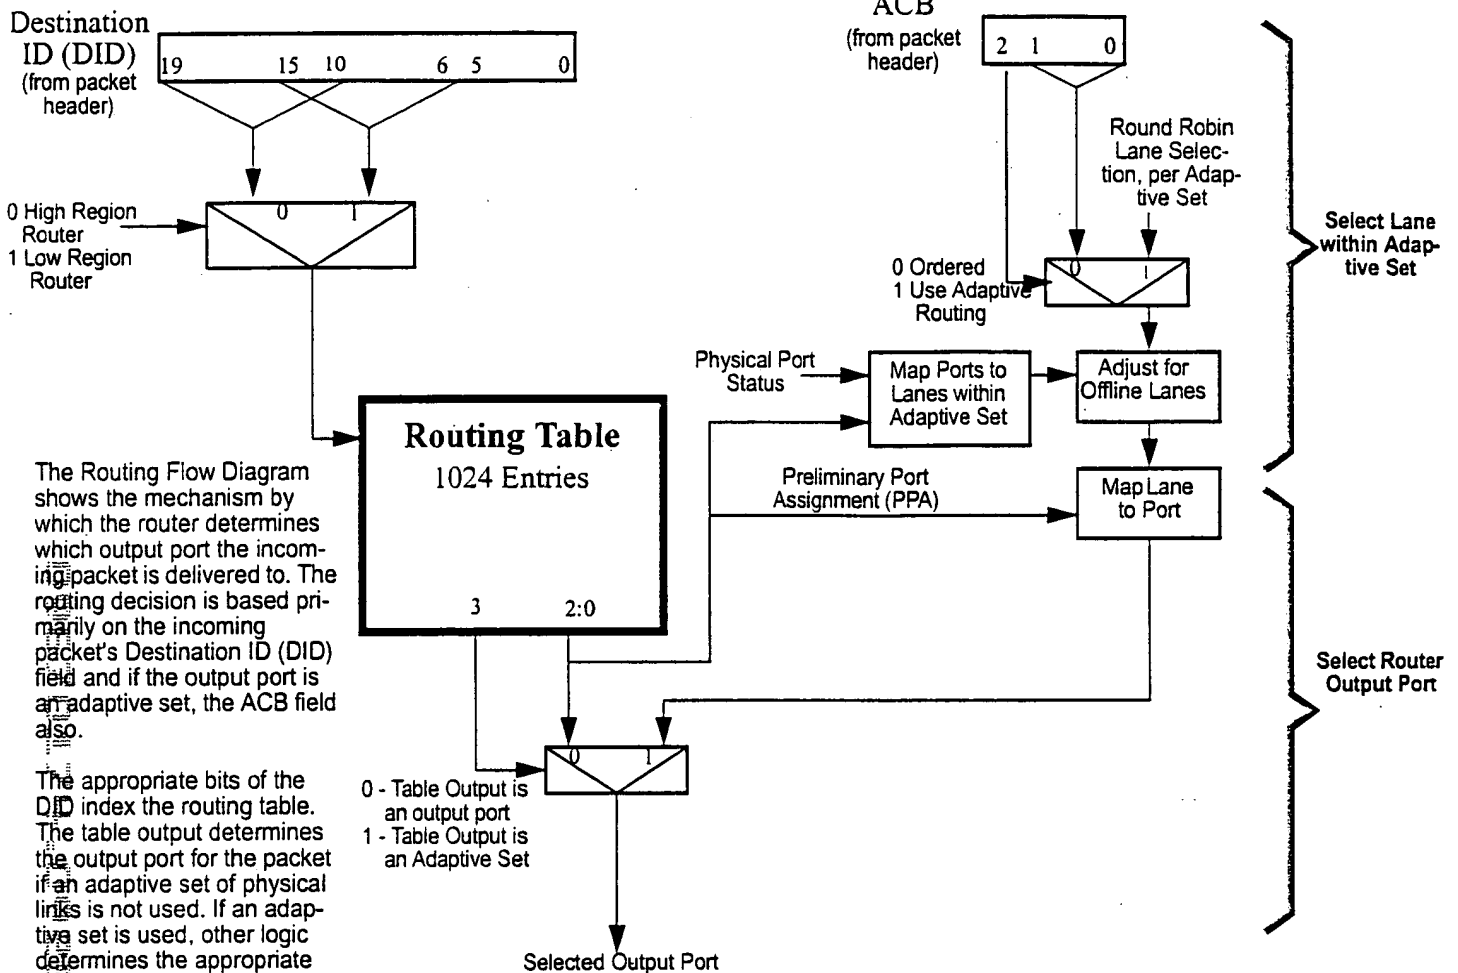

**Figure 10. Routing Flow Diagram**

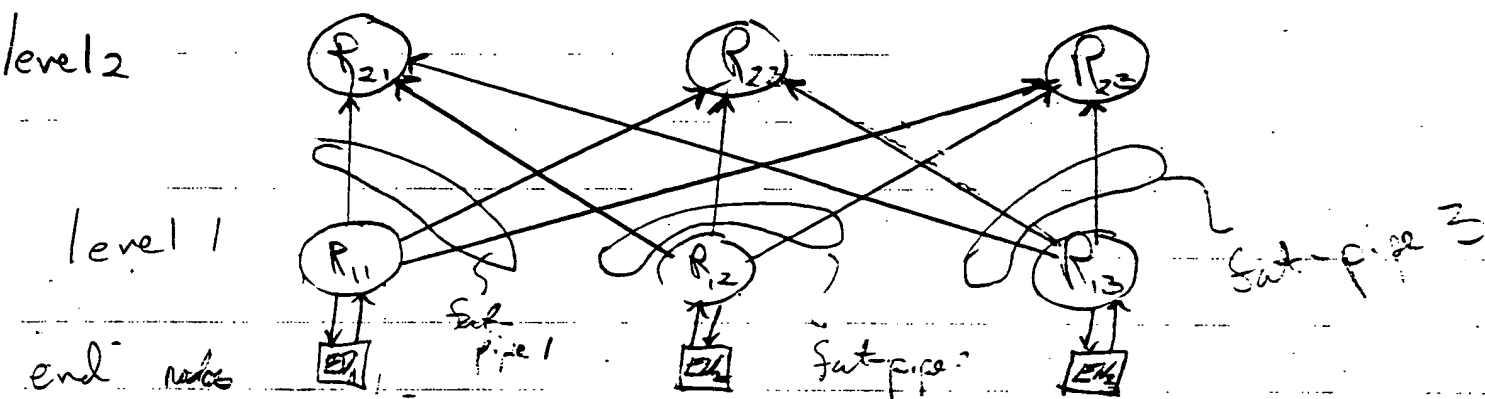


Fig. 11

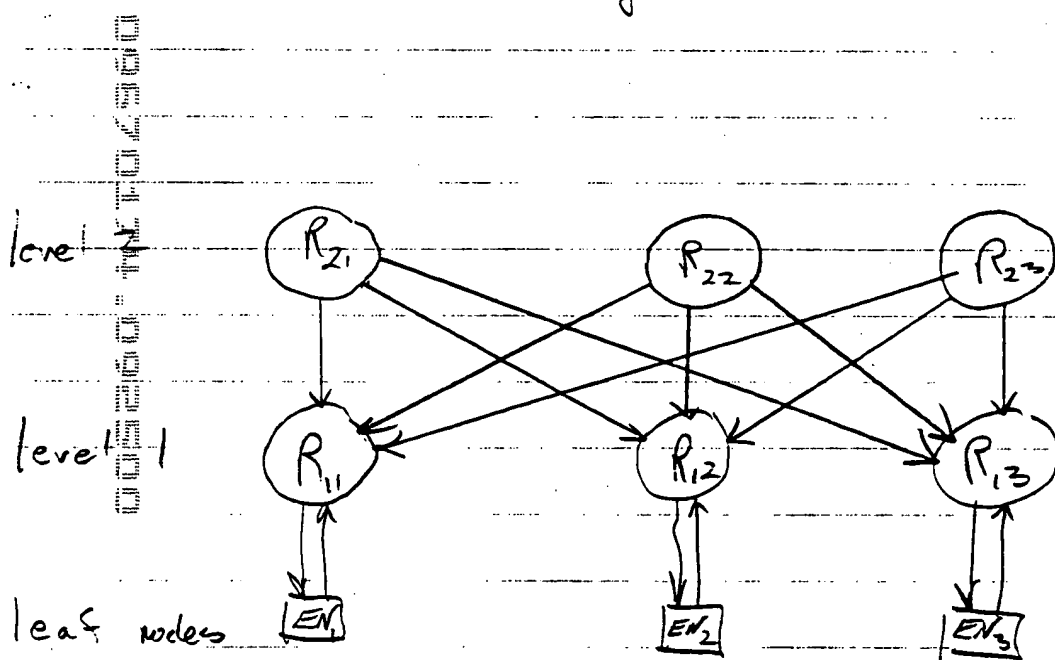


Fig. 12